




## WMS 020



**Housing** : Die cast aluminium body finished in black color  
**Painting** : Polyester powder coated  
**Gasket** : Weatherproof and durable silicone rubber  
**Front Glass** : Clear toughened safety glass  
**Cable Entry** : Silicone rubber grommet  
**Fastening** : All external screws are made of stainless steel  
**Control Gear** : Remote transformer in waterproof box for MR16 lamp  
**Mounting** : Die cast aluminium bracket is provided for ease installation

MR 16/50 W		Spot type	
■ Illuminance Cone	lx	m.	
∅0.17	6750	1	
∅0.35	1687	2	
∅0.50	751	3	
∅0.70	423	4	

MR 16/50 W		Flood type	
■ Illuminance Cone	lx	m.	
∅0.35	5170	0.5	
∅0.70	1339	1	
∅1.40	333	2	
∅2.10	150	3	



**MR16 /GX5.3**  
20W / 35W / 50W



**PAR16 /GU10**  
50W

blue / white / warm white / cool white / red / amber / green


## WMS 021



**Housing** : Die cast aluminium body finished in black color  
**Painting** : Polyester powder coated  
**Gasket** : Weatherproof and durable silicone rubber  
**Front Glass** : Clear toughened safety glass  
**Cable Entry** : Black color silicone rubber grommet  
**Fastening** : All external screws are made of stainless steel  
**Control Gear** : Remote transformer in waterproof box for MR16 lamp  
**Mounting** : Die cast aluminium bracket is provided for ease installation

PAR 20/50 W		Spot type	
■ Illuminance Cone	lx	m.	
∅0.10	11316	0.5	
∅0.17	2944	1	
∅0.35	736	2	
∅0.50	331	3	

PAR 20/50 W		Flood type	
■ Illuminance Cone	lx	m.	
∅0.25	3864	0.5	
∅0.54	1012	1	
∅1.00	253	2	
∅2.60	110	3	

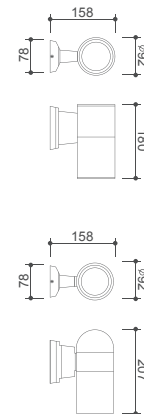

**GLS /E27**  
60W

**MR16 /GX5.3**  
25W / 35W / 50W

**PAR16 /GU10**  
50W

**PAR20 /E27**  
50W


## WMS 022



**Housing** : Die cast aluminium body finished in black color  
**Painting** : Polyester powder coated  
**Gasket** : Weatherproof and durable silicone rubber  
**Front Glass** : Clear toughened safety glass  
**Cable Entry** : Black color silicone rubber grommet  
**Fastening** : All external screws are made of stainless steel  
**Mounting** : Die cast aluminium bracket is provided for ease installation


PAR 30/75 W		Spot type	
■ Illuminance Cone	lx	m.	
∅0.10	26496	0.5	
∅0.17	6900	1	
∅0.35	1720	2	
∅0.50	763	3	

PAR 30/75 W		Flood type	
■ Illuminance Cone	lx	m.	
∅0.25	8464	0.5	
∅0.54	2208	1	
∅1.00	552	2	
∅2.60	248	3	

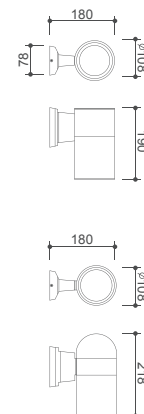

**PAR30 /E27**  
75W / 100W

**TCT-EL /E27**  
5W / 8W / 11W  
(Max length 117 mm.)



### Installation Guide

